

CORRECTED VERSION

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
6 May 2005 (06.05.2005)

PCT

(10) International Publication Number  
**WO 2005/039412 A1**

(51) International Patent Classification<sup>7</sup>: **A61B 5/11**

(21) International Application Number:  
PCT/IT2003/000660

(22) International Filing Date: 24 October 2003 (24.10.2003)

(25) Filing Language: Italian

(26) Publication Language: English

(71) Applicants (for all designated States except US): **HUMANITAS MIRASOLE S.p.A.** [IT/IT]; Via Manzoni, 56, I-20089 Rozzano, Milano (IT). **UNIVERSITA' DEGLI STUDI DI PAVIA** [IT/IT]; Dipartimento di Informatica e Sistemistica, Via Ferrata, 1, I-27100 Pavia (IT).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **PANELLA, Lorenzo** [IT/IT]; c/o Istituto Clinico Humanitas, Via Manzoni, 56, I-20089 Rozzano (IT). **BUIZZA, Angelo**


[IT/IT]; c/o Università' Degli Studi Di Pavia, Via Ferrata, 1, I-27100 Pavia (IT). **LOMBARDI, Remo** [IT/IT]; c/o Università' Degli Studi Di Pavia, Dipartimento di Informatica e Sistemistica, Via Ferrata, 1, I-27100 Pavia (IT). **BELTRAMI, Giorgio** [IT/IT]; c/o Università' Degli Studi Di Pavia, Dipartimento di Informatica e Sistemistica, Via Ferrata, 1, I-27100 Pavia (IT). **GANDOLFI, Roberto** [IT/IT]; c/o Università' Degli Studi Di Pavia, Dipartimento di Informatica e Sistemistica, Via Ferrata, 1, I-27100 Pavia (IT).

(74) Agents: **GIUGNI, Diego et al.**; Jacobacci & Partners S.p.A., Via Senato, 8, I-20121 Milano (IT).

(81) Designated States (national): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, EG, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT (utility

[Continued on next page]

(54) Title: A MOTOR FUNCTION TEST SYSTEM

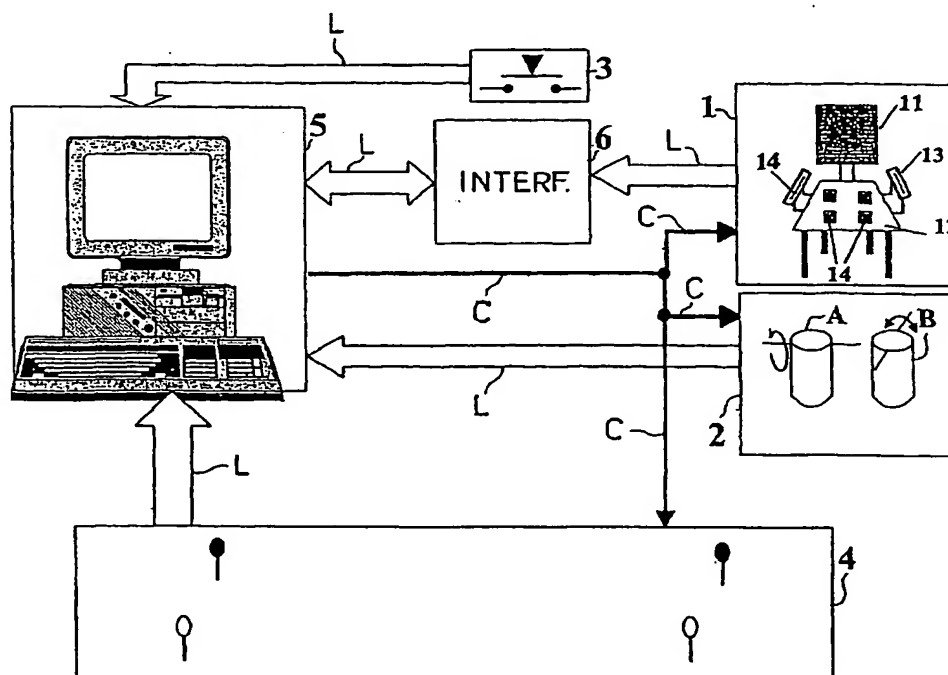

(57) Abstract: The present finding relates to a motor function test system as well as to a method of acquisition and collection of the signals and their processing into the corresponding parameters for a motor function test. In particular, said system and method relate to the quantification of the performance of a subject during the evaluation of balance as defined by the Tinetti test.



model), PT, RO, RU, SC, SD, SE, SG, SK (utility model), SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

**Published:**

— with international search report

**(48) Date of publication of this corrected version:**

23 June 2005

- (84) Designated States (regional):** ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**(15) Information about Correction:**

see PCT Gazette No. 25/2005 of 23 June 2005, Section II

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**DESCRIPTION****"A MOTOR FUNCTION TEST SYSTEM"**

[0001]. The present finding relates to a motor  
5 function test system as well as to a method of  
acquisition and collection of signals and their  
processing into the corresponding parameters for a motor  
function test. In particular, said system and method  
relate to the quantification of the performance of a  
10 subject during the evaluation of balance as defined by  
the Tinetti test.

[0002]. The Tinetti test is widely used for  
evaluating the control of posture and the motor capacity  
of elderly or disabled people. This test is based on a  
15 series of simple movements from daily life, which must be  
performed by the subject in a defined sequence. The  
performance of the subject is evaluated by the physician  
or by the physiotherapist who expresses their judgement  
through a numerical score based on a predefined reference  
20 scale.

[0003]. From that already described, the outcome  
of the Tinetti test is largely subjective precisely  
because it relies on the evaluation criteria of the  
examiner. It is therefore apparent that the test may be  
25 distorted or however altered by said subjective nature.

Only an objective test can ensure homogeneous evaluation criteria and, hence, the possibility of comparing different evaluations, i.e. both evaluations performed by different staff on the same patient and evaluations  
5 performed by the same staff on different patients.

[0004]. The problem at the heart of the present invention is therefore to devise a motor function test system which allows the achievement of objective evaluations.

10 [0005]. Such a problem is resolved by a motor function test system as covered by the attached claims.

[0006]. A first subject of the present invention is therefore that of providing a motor function test system which exploits the measurement of biomedical  
15 parameters and/or functions correlated with the movement of the subject and/or with their posture control during the Tinetti test.

[0007]. A second subject of the present invention is that of providing a method for the acquisition and  
20 collection of signals and their processing into the corresponding parameters for a motor function test, as provided by said motor function test system.

[0008]. Further characteristics and advantages of the aforementioned system and method shall become evident  
25 from the following description of an embodiment of the

invention, given for non-limiting exemplification, with reference to the attached figures wherein:

- figure 1 represents a functional block diagram of the system of the invention;

5       - figure 2 represents, as a useful example for the description, but neither binding nor limiting, a pair of inclinometers of the system of figure 1 to be applied to the chest of a subject.

10       [0009]. The motor function test system as represented schematically in figure 1 comprises various functional units operatively connected to one another. In particular, said system comprises a chair 1 for a motor function test, means 2 suitable for detecting inclinations of the torso of a person subjected to said  
15 motor function test, a button 3 (marker) with related power supply, at least one pair of optical detectors 4, an electronic data processor 5, an interface 6. In figure 1, analogical and/or digital signal lines L and power cables C are also represented.

20       [0010]. The chair 1 is of the type with armrests, endowed with a backrest 11 (optional), a seat 12 and two armrests 13. The backrest 11 and the seat 12 are substantially rigid. Furthermore, the seat 12 and the armrests 13 are each fitted with at least one, thin,  
25 conventional-type pressure sensor 14, on a flexible

support. Thin upholstery can be envisaged in such a manner as to cover and protect said at least one pressure sensor 14 and, at the same time, make the seat 1 more comfortable. Each pressure sensor 14 is of such as to  
5 produce an electrical signal correlated with the pressure exerted on it by the subject subjected to the test. Preferably, said pressure sensor 14 is represented by a thin resistive sensor, made from a sensitive film placed between two flexible polymeric sheets. In general, the  
10 following nominal characteristics may be considered adequate: a full scale of 500 kPa, a maximum applicable pressure of 2500 kPa, a response time of less than 20 ms, a sensitive area and shape such as to conform them to the dimensions of the seat and the armrests.

15 [0011]. In particular, in the exemplificative embodiment as per point [0008], on the seat 12 said at least one sensor is represented by four square sensors 14, of the type Interlink Electronics Europe FSR154, arranged in a 2x2 matrix, whilst on each of the armrests  
20 13 there is a rectangular sensor of elongates shape, of the type Interlink Electronics Europe FSR648AS, with the long side aligned with the axis of the armrest itself. Said sensors 14 have the following nominal characteristics:

25 - range of measurement: from 69 Pa to 689 kPa;

- maximum pressure:  $\cong 3400\text{kPa}$ ;
- response time  $\cong 2\text{ms}$ ;
- typical load free resistance:  $0.4\text{ M}\Omega/\text{cm}^2$ , which diminishes progressively with increasing load;
- 5        - sensitive area approx.  $14\text{ cm}^2$ .

In this exemplificative embodiment, furthermore, said sensors 14 are connected to the electronic data processor 5 through cables and the relative connectors, entirely conventional and therefore  
10 not shown, suitable for the transmission of the signals produced by the sensors and for the supply of power for the sensor themselves. Advantageously, in addition, the cable connectors are positioned below the seat 12 together with a capacitor, itself also conventional and  
15 not shown, having the task of filtering the voltage of the DC power source for the sensors. In addition, one or more integrated circuits may be present, for a total number of functional amplifiers (four in said exemplificative embodiment) sufficient to make suitable  
20 low-pass anti-aliasing filters, considering the subsequent analogue-digital conversion of the pressure signals. Furthermore, the power supply of the sensors 14 may be realized by batteries placed for example under the seat 12 and/or the armrests 13.

25        [0012]. The means 2 suitable for detecting

inclinations of the torso of a person may preferably comprise a pair 2 of inclinometers, or possibly a mono- or bi-axial accelerometer, to be applied to the torso.

[0013]. Said pair 2 of inclinometers is  
5 represented by a first inclinometer A appointed to measure the inclination of the torso in the anterior-posterior plane and a second inclinometer B appointed to measure the inclination of the torso in the mediolateral plane. In general, said pair of inclinometers should have  
10 a full scale of at least  $\pm 25^\circ$ . In the event that accelerometers are used, the procedure is analogous.

[0014]. Preferably, said pair of inclinometers is represented by two mechanical-electrical inclinometers of the type Midori Precision PMP-S30TX, shown in Fig. 2,  
15 with the following nominal characteristics:

- supply voltage ( $V_0$ ): from 4.5 to 8 V DC;
- full scale:  $\pm 30^\circ$ ;
- corresponding output voltage range: 2.5 V (offset)  $\pm 1.1$  V, with supply  $V_0 = 8$  V;
- 20 - linearity:  $\pm 1\%$  FS;
- sensitivity (including hystereses) better than  $0.03^\circ$ ;
- output sensitivity:  $0.00225 V_0 \pm 2\% V/^\circ$  ( $V_0$  in 20 Volts);
- 25 - response time  $\approx 0.2$  s;



- dimensions: diameter = 20 mm, height = 40 mm;
- weight: 35 grams;
- buffering in 200CS siliconised oil.

[0015]. In the event that the full scale of the pair of inclinometers 2 is less than  $\pm 45^\circ$ , it is advisable that the pair of inclinometers 2 be mounted on a suitable support 15 such as for example a polycarbonate support as schematically represented in figure 2. In general, the support 15 must be constructed in such a manner that the corresponding planes of maximum sensitivity of the inclinometers A and B are perpendicular to one another. Indeed, when the pair 2 of inclinometers A and B is fixed onto the chest of an individual, as will be better described in the following, the aforementioned two planes must be substantially parallel to the medial and frontal planes respectively of said individual. The support in question must allow the orientation of the planes of maximum sensitivity of each inclinometer according to the direction of gravity, when the inclinometers are applied to the chest of the patient and they assume the normal erect posture. Such alignments are carried out on each subject prior to the beginning of the test (see below) and has the purpose of allowing the best exploitation of the dynamics of the sensor and of limiting the risk of saturation of the measurement during

the execution of the movements which require wider inclinations of the torso. This requirement does not arise if the measurement range is sufficiently wide, i.e., beyond  $\pm 45^\circ$ , as already mentioned.

5        [0016]. For this reason, the support 15 may be constituted, as in the exemplificative embodiment already repeatedly mentioned, by two parallel plates: one inner 16 and one outer 17 connected to one another in such a manner as to rotate with respect to one another around an  
10 axis perpendicular to their planes. The inner plate 16, when the support is mounted on a subject, is placed in contact with the body of said subject, whilst the plate 17 is external with respect to said body.

      [0017]. In particular, the inner 16 and outer 17  
15 plates have, in the said exemplificative embodiment, substantially rectangular shape and, as represented in figure 2, said connection is made in the proximity of one of the sides of said plates 16 and 17. The means of connection comprise a pivot 18 fixed to the inner plate  
20 16 and a thin window 19 which extends in a circular arch shape formed in the outer plate 17. The window 19 engages said pivot 18 in such a manner as to allow the rotation of the outer plate 17 over the inner plate 16. This rotation, once a subject has been made to wear the  
25 inclinometers A and B using the devices (elasticised

strap 22 and braces 24) as per the following point, allow the alignment of the plane of maximum sensitivity of the inclinometer B with respect to the direction of gravity. The alignment of the corresponding plane of maximum sensitivity of the inclinometer A takes place by leaving the inclinometer itself free to oscillate around an axis 20 perpendicular to the axis of the inclinometer A and then fixing this latter, in the position thus assumed, using a locking screw 21.

10       [0018]. The inner plate 16 is then movably mounted on an elasticised strap 22 using two buttonholes 23 formed on two of its opposing sides. In addition, said inner plate 16 is also engaged by two braces 24 through two corresponding buttonholes 25. The strap 22 and the  
15 braces 24, as will be described later, have the role of allowing the wearing of the pair of inclinometers 2 at the level of the torso on a person.

      [0019]. The outer plate 17 constitutes the actual support for the inclinometers A and B. Indeed, as  
20 represented in figure 2, on its surface turned in the opposite direction with respect to the inner plate 16, are mounted an inclinometer A, through the axis 20 and related holding screws 21 as described above, an inclinometer B fixed rigidly to said outer plate 17, a  
25 capacitor (not shown) for the filtering of the DC supply

voltage and one or more integrated circuits (IC, not shown) containing a suitable number of operational amplifiers (four in said exemplificative embodiment) to be used as output buffers and as anti-aliasing filters in view of the subsequent analogue-digital conversion of the signals from the inclinometer.

[0020]. Preferably, a battery 26 of suitable voltage and charge may also be mounted on the outer plate 17 as a potential independent energy source for the inclinometer, equipped with the necessary circuitry for the supply and with a switch (not shown) in order to be able to select as an energy source, the aforementioned battery, or the external power supply deriving from the electronic data processor 5 or from other sources.

[0021]. The button 3 may be entirely conventionally hand or pedal operated, and is supplied with low voltage power, from the data processor 5 or from an independent battery (for example type AA penlight). It is operated by the physiatrist or physiotherapist who administers the motor function test and may be used as a marker to indicate the start and possibly the end of the various stages of which the motor function test is composed. When pressed, it produces a constant voltage signal, which will be acquired by the electronic data processor 5, together with the signals produced by the

other components of the system.

[0022]. It should be noted that the button 3 may be substituted by any other means which allows the marking of the beginning and the end of each stage of the test, such as, for example, a keyboard or mouse command from the electronic data processor 5 itself. As a consequence, the various stages of the test may be distinguished from one another without any ambiguity, with the aim of correct interpretation and analyses of the signals which are obtained by the electronic data processor 5.

[0023]. In accordance with one preferred embodiment, the motor function test system may comprise, alternatively or in addition to the previous embodiment, at least one pair 4 of optical detectors positioned along a route which the subject must encounter. In particular, said optical detectors are represented by photoemitter-photoreceiver combinations, with or without the insertion of a reflector in the optical path, or by other conventional devices able to detect the passing of a subject. Preferably, said detectors may be positioned at the beginning and end of the route respectively in such a manner as to record the time of departure and that of arrival.

[0024]. The electronic data processor 5 may be for

example constituted by an entirely conventional desktop (PC) or portable personal computer (including a central processing unit CPU and related RAM and ROM memory) and endowed with likewise conventional peripherals (HDD, FDD, CD-ROM drive, possible CD-ROM writer, graphics printer) and user interfaces (in particular keyboard and mouse or equivalent devices).

[0025]. The personal computer 5 is endowed with a data acquisition module (not shown), comprising a analogue-digital conversion card endowed with at least 12 bit A/D input ports, in sufficient numbers to acquire all the signals of interest. According to the present example embodiment, at least the following signals are of interest: a signal for each of the two inclinometers 2, plus possibly a signal for each of the two pairs of optical detectors 4, plus a signal for the button 3, plus a number of additional signals, equal to the number of pressure sensors 14 actually used. Preferably, the same data acquisition module will be endowed with digital output ports to be used for possibly supplying power to the inclinometers 2, the button 3 (if not supplied independently) and the pressure sensors 14, whilst the optical detectors 4 will require, in general, an independent power supply, from a battery or the mains. Analogously, the same data acquisition module could be

endowed with digital input ports, for example of the type TTL, to be used for other possible commands which should be deemed appropriate or necessary for the good operation of the entire system. The said input and output ports are not represented in the figure in as much as such devices are widely known in the sector. This data acquisition module, thanks to its analogue-digital conversion function, in particular allows the sampling the signals originating from the pressure sensors 14, from the inclinometers A and B, from the button 3 and from the optical detectors 4. Such sampled signals represent, for example in the case of the inclinometers A and B, the results of the related inclination measurements of the torso during the movements performed by the subject in accordance with the Tinetti test. The sequence of their values, appropriately expressed in sexagesimal degrees or in other angular measurement units, represent the variation over time of the angle of inclination of the torso with respect to the vertical axis, in the medial and frontal planes, during said test. Analogously, the electrical signals produced by the pressure sensors 14 measure as a function over time the values of the pressure exerted by the subject on the seat 12 and on the armrests 13. The signals produced by the button 3 are represented by impulses which indicate the exact moments

of the beginning and end of each of the different stages of which the motor function test is composed. Analogously, the signals emitted by the optical detectors 4 are represented by impulses, produced in the exact 5 moments in which the subject crosses the line of detection of the detectors themselves, at the beginning and at the end of the envisaged route or at the other points where optical sensors have possibly been placed. All the aforementioned sampled signals, together with the 10 identifying data of the subject and of the test believed necessary, may be usefully organised into a database set up on the personal computer 5 itself or on another computer or stored on whichever other computer media and organised into whichever other form may be deemed 15 relevant and appropriate.

[0026]. The sampled signals as per the previous point will be processed according to the criteria and methods illustrated later, with the aim of obtaining numerical parameters, suitable for objectively 20 characterising the performance of the subject during the execution of the test. All the parameters thus obtained will be then compared with pre-established reference parameters. Through this comparison, the physician will have objective information available for an accurate and 25 completely objective evaluation of the posture control



and the balance of the patient, as resulting from the Tinetti test.

[0027]. A program for the processing of the sample signals acquired as described above and for the calculation of said numerical parameters is loaded within the RAM memory of the above mentioned personal computer 5 or of another personal computer. The same program may be made available to the above mentioned personal computer 5 or other personal computer through floppy disk, CD-ROM or other method known within the sector such as for example methods which envisage transmission through a telecommunications network.

[0028]. The central processing unit of the personal computer 5 or other personal computer, is of such as to run the instructions of the program processing said sample signals.

[0029]. Furthermore, said system may comprise an interface 6 used for enabling/disabling the acquisition of the pressure signals or of the signals from the other sensors, for example by means of BJT switches controlled through the digital output ports. Preferably, said interface 6 is located externally with respect to the personal computer. Alternatively, one might resort to the selection via software of the signals to be acquired.

[0030]. In accordance with an additional variant

embodiment, the motor function test system of the present invention envisages, alternatively or in addition to the preceding embodiments, that the transmission of the signals produced by the inclinometric sensors 2 to the  
5 personal computer 5 be carried out through wireless technology, with the aim of ensuring the complete freedom of movement of the subject during the execution of the test, and to avoid any possible obstructions caused by the connecting cables. In this case, the inclinometers A  
10 and B are connected to a transmission module, for example, mono-channel or dual-channel (not shown), intended to carry out the processing of the signals produced by the inclinometric sensors 2 themselves (possible sampling and A/D conversion, possible  
15 manipulation, modulation, amplification and the rest) in order to make them suitable for irradiation through free space, practicable through an appropriate antenna. Consequently, the acquisition module is equipped with an additional antenna and a receiver module (not shown) in  
20 order to carry out the necessary processing (demodulation, demultiplexing and the rest) of the irradiated signals received. For example, it is possible to use radiofrequency systems of the type known within the sector. One particular system may be represented, for  
25 example, by an embodiment according to the Bluetooth 1.1

international standard, which has adequate characteristics for the transmission of said signals and the components of which are available commercially.

[0031]. It is to be noted that the above mentioned  
5 wireless technology may also be applied to the pressure sensors 14 and to the optical detectors 4.

[0032]. A second subject of the present invention is that of providing a method for detection, collection and processing of parameters for a motor function test  
10 comprising the following stages in sequence:

a) making available a system for a motor function test such as that previously described;

b) applying to a subject for testing means 2  
15 suitable for detecting inclinations of the torso of said subject;

c) detecting the pre-established movements of that subject by means of said means 2 and possibly at least one pressure sensor 14 and possible optical detectors 4;

d) transmitting signals corresponding to said  
20 detection performed in stage c) to the electronic data processor 5;

e) collecting and processing said signals originating from said at least one pressure sensor 14 and/or from said means 2 and/or from said optical  
25 detectors 4 in such a manner as to obtain parameters

representative of the ambulatory and/or the posture control of said subject.

[0033]. In particular, stage c) comprises a series of pre-established movements recordable by the sensors, such as those previously described. Said sensors are able to send signals to the personal computer 5 which will acquire them and will process them in such a manner as to calculate numerical parameters, useful for evaluating the motor capacity of a subject.

[0034]. The movements may be established each time according to the subject type and/or his motor problems. For example, the subject may be initially placed sitting on the chair 1 with the pair 2 of inclinometers worn thanks to the above described strap 22 and braces 24. In this position, the inclinometers A and B are aligned with the vertical axis, which will serve as a reference for the inclination of the torso. Afterwards, the subject is asked to make the following movements in accordance with the Tinetti test:

- movement 1: the subject is asked to maintain the seated position with the hands resting on the knees/thighs;

- movement 2: the subject is asked to rise from the seated position in a natural manner and without the aid of the hands;

- movement 3: the subject is asked to remain standing, after having risen from the chair, in an erect position for approximately 20 seconds with the eyes open (the first 4 seconds are considered as "immediate  
5 standing", the remaining as "prolonged standing");

- movement 4: the subject is asked to maintain the erect position for approximately 15 seconds with the eyes closed;

- movement 5: the subject is asked to make a  
10 complete 360° turn around themselves on the spot;

- movement 6: the subject is asked to resist three light pushes applied by the physician at the level of the sternum;

- movement 7: the subject is asked to perform a  
15 direct walking movement between the pair of photocells 4;

- movement 8: the subject is asked to sit down again on the chair 1, which the operator has brought closer in the meantime.

[0035]. Stage c) comprises the detection of the  
20 movements of the subject during the test through means of detection which may comprise, for example the above mentioned pressure sensors 14, inclinometers 2 and optical detectors 4. These means of detection produce electrical signals which may be transmitted to the  
25 personal computer 5 through cables or, in accordance with

the above mentioned preferred embodiment, wirelessly.

[0036]. In particular, the pressure sensors 14 placed on the seat 12 serve to monitor the presence of the subject, or rather whether they are seated or not, and, in the case they are seated, if their posture is symmetrical or unbalanced towards the right or towards the left. Whilst the pressure sensors 14 on the armrests 13 serve to verify whether that subject rests on them during the standing up and/or sitting down movements, and in the affirmative case, whether they rest equally on both armrests or not.

[0037]. The optical sensors 4 record the moment of departure and that of the arrival of the subject along the distance which separates them.

[0038]. Stage e) comprises the automatic calculation, performed by the computer 5 or other data processor, of a collection of numerical parameters able to quantify the performance of the subject during the execution of the test and, in particular, allowing the classification of such performance as normal or altered. To that end, a program for the processing of the signals acquired and for the calculation of said numerical parameters, as already mentioned in point [0026] is loaded within the RAM memory of the above mentioned personal computer 5, or other personal computer.

[0039]. Preferably, the above mentioned numerical parameters will be morphological in nature (such as: measurements of breadth, duration, speed, etc.) and different for the various stages of which the test is composed. They may be further processed and combined, by using the techniques known within the sector, preferably with the aim of obtaining a single performance index, on the basis of which, and for comparison with suitable normal reference values, the physician may express a judgement of normality or of abnormality with reference to the performance of the subject. Alternatively, other forms of parameterisation and/or other performance indices which will show themselves to be useful and appropriate for the evaluation of the performance of the subject may be adopted.

[0040]. The method in accordance with the present invention may envisage the use of the previously described system comprising the pressure sensors 14 placed on the armrests 13 of the chair 1. Thanks to them, it is possible to evaluate whether the subject uses the armrests 13 for standing up or sitting down and measure the symmetry of any resting and its amount, and, hence, its importance regarding the execution of the task. In this manner, the method is advantageously enriched with an objective data point, useful with regard to better

characterisation of performance. The presence of the armrests and the possibility of using them, in addition, increases the degree of composure and safety of the patient and contributes towards reducing the risk of  
5 falling.

[0041]. Alternatively or in combination, the method of the invention may also comprise the use of the above described optical detectors 4 arranged along a route which the subject must encounter. The  
10 predisposition of said optical detectors 4 advantageously allows the provision of an additional data point regarding the moments of departure and arrival of the subject along the route between said detectors and hence of measuring the journey time with greater accuracy,  
15 which, in turn, will depend on good or bad ambulation. It follows that an additional indicator of the possibility of falling may be observed and taken into consideration.

[0042]. Furthermore, still alternatively or in combination, the above mentioned method may envisage a  
20 wireless data transmission system such as that previously described. It is apparent that such a system is extremely advantageous since it allows full freedom of movement to the subject who must perform the Tinetti test and hence the most natural test conditions possible, something  
25 which would not be equally guaranteed by cable



transmission. Indeed, under the latter conditions, in particular, when the subject must perform the movement 5 of turning around themselves, they must be assisted by the operator who holds the cables, otherwise the subject themselves would be obliged to raise their arms above the head whilst keeping the cables in the hand in order to avoid tangling them around themselves, in this manner, modifying, their movement and, as a consequence, distorting the outcome of the test. Furthermore, thanks 10 to wireless transmission, during stage 8 the operator is not hampered by the cables when near the patients chair.

[0043]. The predisposition of a button attached to the electronic data processor 5 allows the operator to then move from one functional unit of the motor function 15 test system to another in order to more closely follow the patient and mark the beginning and the end of each stage more easily and more precisely, without being compelled to return to said data processor.

[0044]. From that described up to now, it is 20 apparent that both the motor function test system and the method for detection, collection and processing of the parameters for a motor function test, such as those previously described, allow providing completely objective evaluations by reducing to the minimum, if not 25 eliminating, the subjective character of the Tinetti test

such as it is.

[0045]. Furthermore, detection parameters are introduced which without doubt improve the objectivisation of the test result and the evaluation of  
5 the risk of falling of a subject subjected to the test.

[0046]. Finally, the execution conditions of the test are once again notably improved in favour of an optimal result such as was not possible with the systems of the known art.

## CLAIMS

1. A motor function test system comprising a chair  
(1) for a motor function test comprising a seat (12)  
endowed with at least one pressure sensor (14) and  
5 armrests (13) each endowed with at least one pressure  
sensor (14), means (2) suitable for detecting  
inclinations of the torso of a subject, an electronic  
data processor (5) of such as to receive signals emitted  
by said at least one pressure sensor (14) and from said  
10 means (2) when stimulated, and of such as to collect said  
signals and process the corresponding descriptive  
parameters.

2. The motor function test system according to claim  
1, comprising in addition at least one pair of optical  
15 detectors (4) placed at the beginning and at the end of  
an established route which said subject must encounter.

3. The motor function test system according to  
claims 1 or 2, wherein the transmission of the signals  
from said pressure sensors (14), from said means (2) and  
20 from said pair of optical detectors (4) to said  
electronic data processor (5) is carried out using  
wireless technology.

4. The motor function test system comprising a chair  
(1) for a motor function test endowed with at least one  
25 pressure sensor(14) positioned on the seat (12), means

(2) suited to detecting inclinations of the torso of a subject, at least one pair of optical detectors (4) placed at the beginning and end of an established route which a subject must encounter, an electronic data processor (5) of such as to receive the signals emitted by said at least one pressure sensor (14), by said means (2) and by said pair of optical detectors (4) when stimulated, and of such as to collect said signals and process the corresponding descriptive parameters.

10        5. The motor function test system according to claim 4, wherein the transmission of the signals from said pressure sensors (14), from said means (2) and from said pair of optical detectors (3) and said electronic data processor (5) is carried out using wireless technology.

15        6. The motor function test system comprising a chair (1) for a motor function test endowed with at least one pressure sensor (14) positioned on the seat (12), means (2) suited to detecting inclinations of the torso of a subject, an electronic data processor (5) of such as to  
20 receive the signals emitted from said at least one pressure sensor (14) and from said means (2) when stimulated, and of such as to collect said signals and process the corresponding parameters, wherein the transmission of the signals to said electronic data  
25 processor (5) is carried out using wireless technology.

7. The motor function test system according to any of the claims 1 to 6, comprising in addition an interface (6) for enabling/disabling the acquisition of said signals towards said electronic data processor (5).

5        8. The motor function test system according to any of the claims 1 to 7, wherein said at least one pressure sensor (14) is mounted onto a flexible support.

9. The motor function test system according to claim 8, wherein said at least one pressure sensor (14) is a  
10 thin resistive sensor made with a sensitive film placed between two flexible polymeric sheets, preferably said at least one pressure sensor is of the type Interlink Electronics Europe FSR154 on the seat (12), whilst it is of the type Interlink Electronics Europe FSR648AS on the  
15 armrests(13).

10. The motor function test system according to any of the claims 1 to 9, wherein said means (2) suitable for detecting inclination of the torso of a subject comprising a pair of inclinometers (A,B).

20        11. The motor function test system according to claim 10, wherein said pair of inclinometers (A,B) is constituted by a first inclinometer (A) appointed to measure the inclinations of the torso of a subject in the anterior-posterior plane and a second inclinometer (B)  
25 appointed to measure the inclinations of the torso of

said subject in the mediolateral plane.

12. The motor function test system according to claims 10 or 11, wherein said pair (2) of inclinometers (A,B) are of the type Midori Precision PMP-S30TX.

5 13. The motor function test system according to any of the claims 10 to 12, wherein said pair (2) of inclinometers (A,B) are mounted onto a support (15) constructed in such a manner as to allow the orientation of the respective planes of maximum sensitivity of said  
10 inclinometers (A,B) perpendicularly to one another.

14. The motor function test system according to claim 13, wherein said support (15) comprises two parallel plates inner (16) and outer (17) connected to one another in such a manner as to rotate one with  
15 respect to the other around an axis perpendicular to their plane.

15. The motor function test system according to claim 14, wherein said inner plate (16) is movably mounted onto an elasticised strap (22) through a  
20 buttonhole (23) and is engaged with two braces (24) through two corresponding buttonholes (25) in order to allow that a subject may wear said pair of inclinometers (2).

16. The motor function test system according to any  
25 of the claims 2, 3, 5 and from 7 to 15, wherein said at

least one pair of optical detectors (4) are represented by two pairs of photocells or two pairs of photocell-reflectors or similar devices suitable for detecting the passage of a subject through them.

5        17. The motor function test system according to any of the claims 1 to 16, wherein said interface (6) enables/disables the acquisition of the electrical signals originating from said pressure sensors (14) and/or pair of inclinometers (2) and/or pair of optical  
10 detectors (4).

      18. The motor function test system according to any of the claims 3 and from 5 to 17, wherein said transmission of the electronic signals uses radiofrequency systems, in particular carried out  
15 according to the Bluetooth 1.1 international standard or the like.

      19. The motor function test system according to claims 1 to 18, comprising in addition a button (3) connected to said electronic data processor (5) in order  
20 to indicate the beginning and possibly the end of the various stages of which the motor function test is composed.

      20. A method for the acquisition and collection of signals and their processing into the corresponding  
25 parameters for a motor function test comprising the

following stages in sequence:

a) providing a motor function test system according to any of the claims 1 to 19;

b) applying to a subject to be tested the means (2) suitable for detecting inclinations of the torso of said subject;

c) detecting the pre-established movements of such subject by means of said means (2) and possibly the at least one pressure sensor (14) and possibly the optical detectors (4);

d) transmitting the signals corresponding to said detection achieved in stage c) to the electronic data processor (5);

e) collecting and processing said signals originating from said at least one pressure sensor (14) and/or from said means (2) and/or from said optical detectors (4) in such a manner as to obtain parameters representative of the degree of ambulation and or posture of said subject.

21. The method according to claim 20, wherein said detection stage c) is achieved by detecting variations in pressure and/or inclination and/or the passing respectively between said pressure sensors (14), said means (2) and said at least one pair of optical sensors (4).



22. The method according to claims 20 or 21, wherein said transmission stage takes place using cable or wireless technologies.

23. The method according to claims 20, 21 or 22,  
5 wherein said stage of collection and processing of the signals originating from said pressure sensors (14) and/or from said means (2) and/or from said at least one pair of optical sensors (4) by said electronic data processor (5) comprises the transformation of the signals  
10 into the digital data from which said parameters are obtained.

24. The method according to claim 23, wherein the aforementioned parameters are numerical morphological parameters which may be further processed and combined  
15 with the aim of obtaining a single performance index.

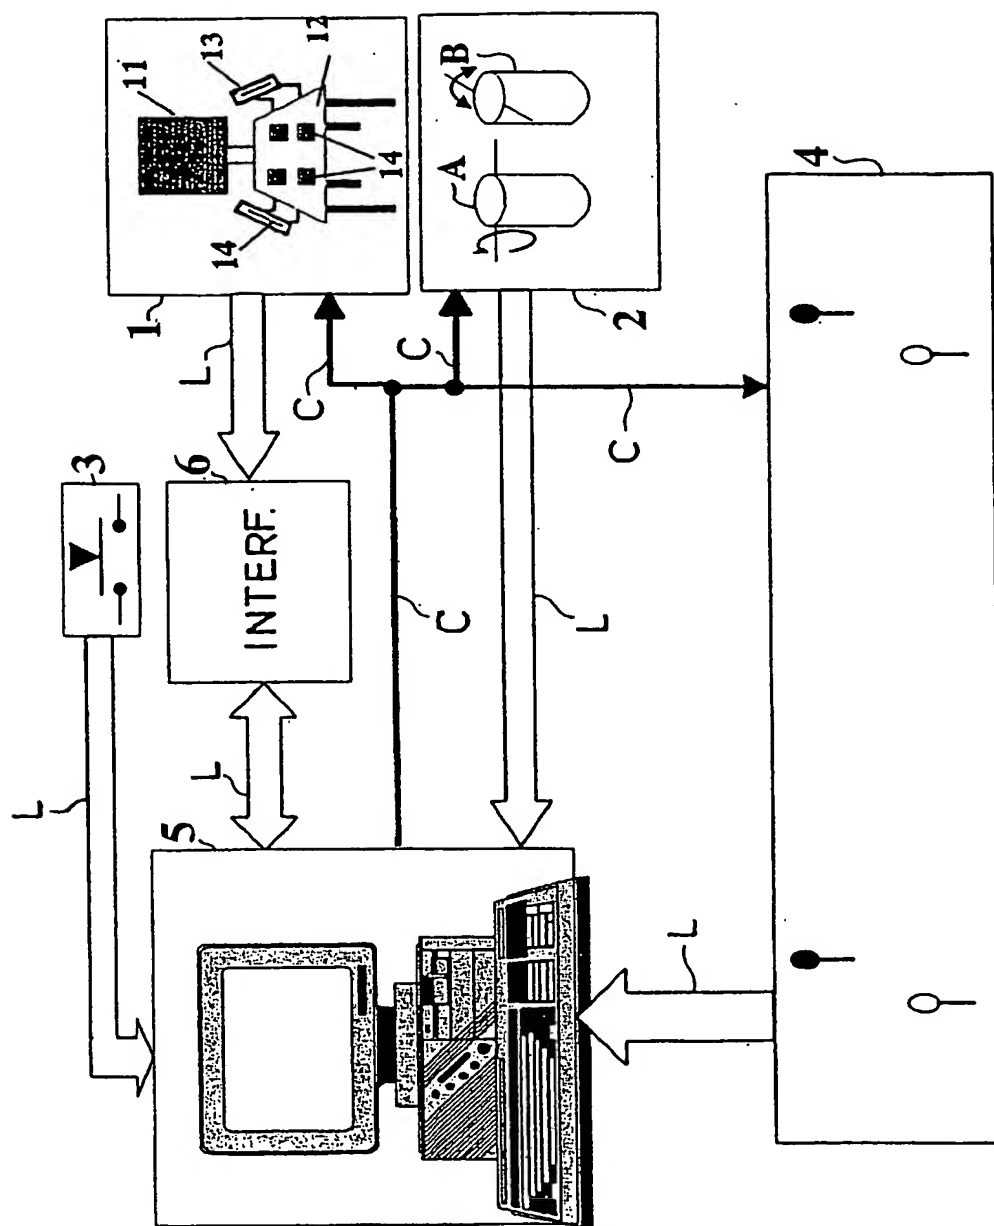


FIG. 1

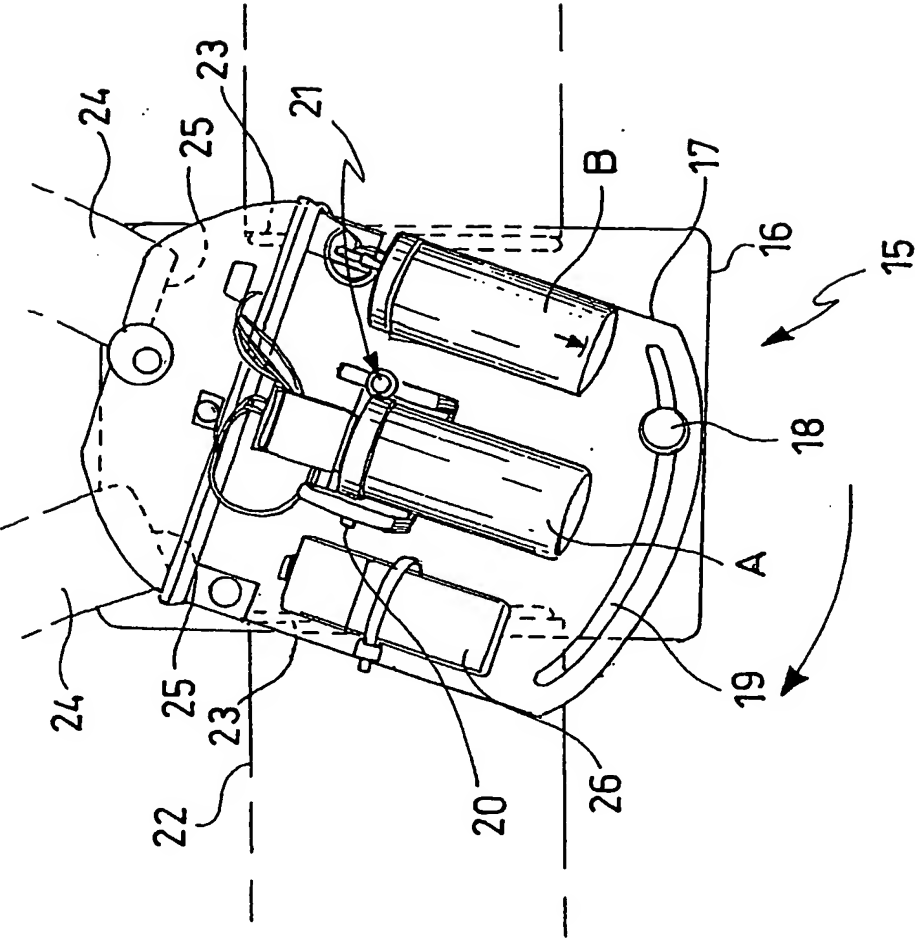


FIG. 2

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/IT 03/00660

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 A61B5/11

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A61B A63B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, EMBASE

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	<p>LOMBARDI R; BUIZZA A; GANDOLFI R; VIGNARELLI C; GUAITA A; PANELLA L: "Measurement on Tinetti test: instrumentation and procedures" TECHNOLOGY AND HEALTH CARE: OFFICIAL JOURNAL OF THE EUROPEAN SOCIETY FOR ENGINEERING AND MEDICINE, vol. 9, no. 5, 2001, pages 403-415, XP008030897 Netherlands ISSN: 0928-7329 the whole document page 404, last paragraph - page 406, last paragraph; figures 1,2 page 414, paragraph 4 page 407, paragraph 3 ----- -/--</p>	1-3,7-24



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

## \* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

1 June 2004

Date of mailing of the international search report

24 AUG 2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Neef, T

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	PANELLA L., LOMBARPANELLA LORENZO; LOMBARDI REMO; BUIZZA ANGELO; GANDOLFI ROBERTO; PIZZAGALLI PAOLA: "Towards objective quantification of the Tinetti test" FUNCTIONAL NEUROLOGY, vol. 17, no. 1, January 2001 (2001-01), - March 2001 (2001-03) pages 25-30, XP008030896 Italy ISSN: 0939-5264 the whole document page 26, left-hand column, paragraph 2 - page 27, right-hand column, paragraph 1; figure 1	1-3, 7-24
A	GB 2 357 848 A (SMS TECHNOLOGIES LTD) 4 July 2001 (2001-07-04)  page 2, line 10 - page 3, line 2; figures 4-6 page 4, line 8 - line 23 page 6, line 11 - page 10, line 2	1, 3, 7-9, 17-20, 22-24
A	EP 1 195 139 A (ECOLE POLYTECH) 10 April 2002 (2002-04-10)  page 2, line 1 - line 55 page 3, line 30 - line 42 page 7, line 11 - page 9, line 35 page 4, line 28 - line 34 figures 1, 8, 9	1, 3, 7, 10, 15, 17-24
A	US 2002/170193 A1 (ARMS STEVEN W ET AL) 21 November 2002 (2002-11-21)  page 1, paragraph 5 - paragraph 9 page 5, paragraph 58 - page 6, paragraph 74 page 7, paragraph 78 - paragraph 86 figures 2-4, 6, 7	1, 3, 7, 10-15, 17-24
A	WO 02/064032 A (SIEMENS MEDICAL SOLUTIONS USA) 22 August 2002 (2002-08-22) page 4, line 18 - line 28 page 6, line 1 - line 17; figures 1, 2	3, 7, 18, 22
A	US 2002/055691 A1 (TASCH URI ET AL) 9 May 2002 (2002-05-09) page 4, paragraph 37; figure 1	2, 16, 20, 21
	-/--	

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/IT 03/00660

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>US 5 919 149 A (ALLUM JOHN H) 6 July 1999 (1999-07-06)</p> <p>column 3, line 55 - column 4, line 17; figure 2 column 6, line 14 - column 7, line 20 column 9, line 19 - column 10, line 61 column 14, line 47 - line 60 -----</p>	<p>1,3,7, 10,11, 18,20, 22,24</p>

# INTERNATIONAL SEARCH REPORT

national application No.  
PCT/IT 03/00660

## Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:  
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:  
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
3. ☐ Claims Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

## Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. ☐ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☒ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

1-3, 7-19, 20-24

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. claims: 1-3,7-19,20-24

Motor function test system with arm rest endowed with sensor  
---

2. claims: 4,5, 7-19

Motor function test system with optical detectors at start  
and end of an established route the subject encounters  
---

3. claims: 6,7-19

Motor function test system with wireless transmission of  
signals from the sensors to the data processor  
---



# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/IT 03/00660

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
GB 2357848	A	04-07-2001	NONE	
EP 1195139	A	10-04-2002	EP 1195139 A1	10-04-2002
			AU 8946601 A	15-04-2002
			WO 0228282 A1	11-04-2002
			EP 1322227 A1	02-07-2003
			US 2004015103 A1	22-01-2004
US 2002170193	A1	21-11-2002	NONE	
WO 02064032	A	22-08-2002	EP 1359842 A2	12-11-2003
			JP 2004518483 T	24-06-2004
			WO 02064032 A2	22-08-2002
			US 2002115914 A1	22-08-2002
US 2002055691	A1	09-05-2002	AU 6511701 A	11-12-2001
			CA 2410533 A1	06-12-2001
			EP 1284649 A2	26-02-2003
			JP 2004513613 T	13-05-2004
			WO 0191640 A1	06-12-2001
			US 2004158174 A1	12-08-2004
US 5919149	A	06-07-1999	NONE	